

BATTERY OPERATED TOOLS

■ Model No. **K-BGD3** (with Li-ion Battery & Charger)

Length : 459 mm

Weight : 3.1 kgs(w/o battery)

■ Specifications:

Drive unit : 18V DC Motor

Charger (GS/CE):

Input voltage : 110V Single Phase AC

Input voltage : 230V Single Phase AC

Input frequency : 50-60 Hz

Reservoir capacity : 40 cc

■ Crimping Capacity:

Max. Pressure : 460 bar

Max. Output : 1.93 tons / 17.2 kN

■ Features:

- Proper crimps are assured with butting steel jaws.
- Increased strength and greater bearing area is provided with larger steel bolts.
- Fast, easy, one-hand die insertion.
- No lost dies with spring loaded positive lock die retainer buttons.
- Full crimp force assured with over center cam action.
- Operator protection provided with butt stops and heat shrinktubing.
- Long life expectancy provided with fiberglass handles and light weight high strength aluminum alloy castings.
- The "D3" groove accommodates the line of type "W"-die inserts.

■ Connector Range:

- Copper, Aluminum, ACSR, Copperweld, Alumoweld, Steel, 6201, 5005, Compressed and Compact conductors.
- Copper Taps: # 10 sol.-2/0 str.
- Aluminum, ACSR Taps: # 14 sol. -4/0 ACSR
- Stirrups: # 6 ACSR-4/0 ACSR
- Overhead Full Tension Deadend, Full Tension Splices, Non Tension Splices, and Terminals Conductor Range: # 10 str. -4/0 ACSR
- Code conductor connectors: # 6-4/0 str. Copper and Aluminum

KuDos KW-dies	Burndy W-Dies	KuDos KW-dies	Burndy W-Dies
KW-BG	W-BG	KW-165	W-165
KW-O	W-O	KW-166	W-166
KW-C	W-C	KW-171	W-171
KW-K840	W-K840	KW-237	W-237
KW-161	W-161	KW-243	W-243
KW-162	W-162	KW-247	W-247
KW-163	W-163	KW-249	W-249
KW-164	W-164	KW-702	W-702



LED
Illumination

18V
Longterm Power



MANUAL
Follow User Guide

MAINTAIN
Maintain Regularly

PROTECTION
Put On Goggles



PROTECTION
Work With Glove



EASY
For Small Space



SKIDPROOF
Comfortable Design



350°
Hand Rotation

RELOAD
Back To Origin

BATTERY
110V or 230V Charger



PROTECTION
Low V protection



AUTO STOP
To Cut Off The Power



PROTECTION
Check Loading



ROUND CRIMPING



TERMINAL



SPEED DELIVERY

※ Crimping without die sets is prohibited.

■ Model No. **K-PH300** (with Li-ion Battery & Charger)

Length : 359 mm

Weight : 3.0 kgs(w/o battery)

■ Specifications:

Drive unit : 18V DC Motor

Charger (GS/CE):

Input voltage : 110V Single Phase AC

Input voltage : 230V Single Phase AC

Input frequency : 50-60 Hz

Reservoir capacity : 48 cc

■ Crimping Capacity:

Max. Pressure : 550 bar

Max Output : 6.90 tons / 61.4 kN

Max. Compression : 240 mm² copper


Aluminum lugs

Accepts all dies used for Alcoa,
Burndy, T&B, Klauke, Cembre and

Blackburn 6 ton compressors

Dies sold separately (See page 144)

(T16/25/35/50/70/95/120/150/185/240/300)

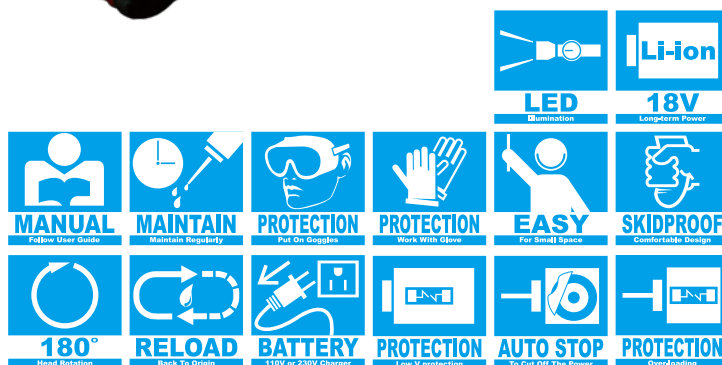

※ Crimping without die sets is prohibited.